


Description

The DFD2001P4-3 is a high power TVS, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive lines. The DFD2001P4-3 complies with the IEC 61000-4-2 (ESD) with $\pm 30\text{kV}$ air and $\pm 30\text{kV}$ contact discharge. It is assembled into a 3-pin DFN2020-3 lead-free package. Each device will protect one line. The combination of small size, and high surge capability makes them ideal for use in applications such as cellular phones, LCD displays, USB, and multi media card interfaces.


Mechanical Characteristics

- ◆ Package: DFN2020-3
- ◆ Case Material: "Green" Molding Compound.
- ◆ Moisture Sensitivity: Level 3 per J-STD-020
- ◆ Terminal Connections: See Diagram Below
- ◆ Marking Information: See Below

Dimensions and Pin Configuration



Circuit Diagram



Transparent top view

Pin Schematic


Features

- ◆ 6500W peak pulse power (8/20 μs)
- ◆ Low leakage: nA level
- ◆ Operating voltage: 20V
- ◆ Ultra low clamping voltage
- ◆ One power line protects
- ◆ Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: $\pm 30\text{kV}$
 - Contact discharge: $\pm 30\text{kV}$
 - IEC61000-4-5 (Lightning) 145A (8/20 μs)
- ◆ RoHS Compliant

Applications

- ◆ Power Management
- ◆ Industrial Application
- ◆ Power Supply Protection

Marking Information

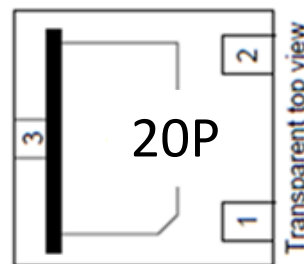

20P = Device Marking Code
Bar denotes cathode

Ordering Information

Part Number	Marking	Packaging	Reel Size
DFD2001P4-3	20P	3000/Tape & Reel	7 inch



Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power(8/20 μs)	Ppk	6500	W
Peak Pulse Current(8/20 μs)	I _{PP}	145	A
ESD per IEC 61000-4-2 (Air)	V _{ESD}	± 30	kV
ESD per IEC 61000-4-2 (Contact)		± 30	
Operating Temperature Range	T _J	-55 to +125	$^{\circ}\text{C}$
Storage Temperature Range	T _{stg}	-55 to +150	$^{\circ}\text{C}$

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise specified)



Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	V _{RWM}			20	V	
Breakdown Voltage	V _{BR}	22			V	I _T = 1mA
Reverse Leakage Current	I _R			0.5	μA	V _{RWM} = 18V
Clamping Voltage	V _C			28	V	I _{PP} = 20A (8 x 20 μs pulse)
Clamping Voltage	V _C			45	V	I _{PP} = 145A (8 x 20 μs pulse)
Junction Capacitance	C _J			440	pF	V _R = 0V, f = 1MHz

Typical Performance Characteristics (TA=25°C unless otherwise Specified)

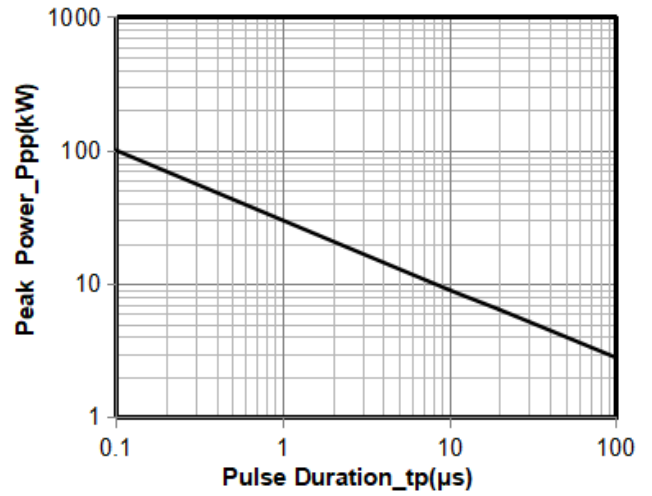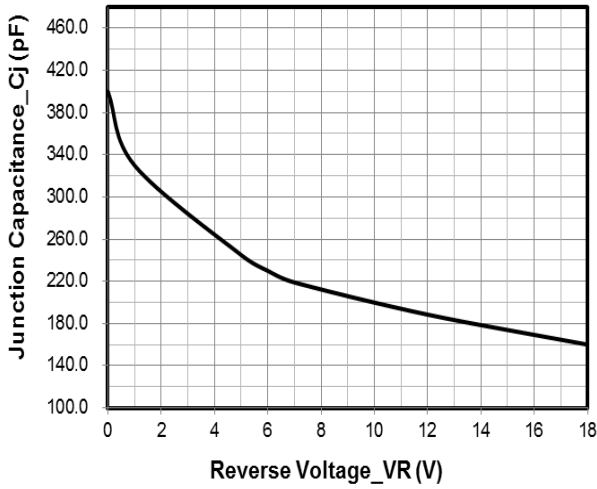



Novction Capacitance vs. Reverse Voltage

Peak Pulse Power vs. Pulse Time

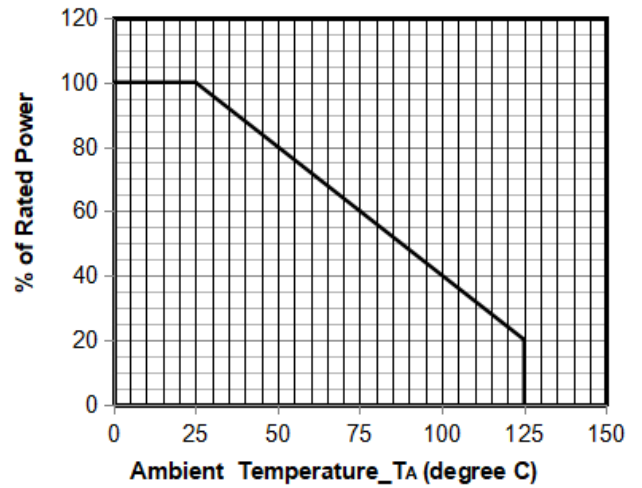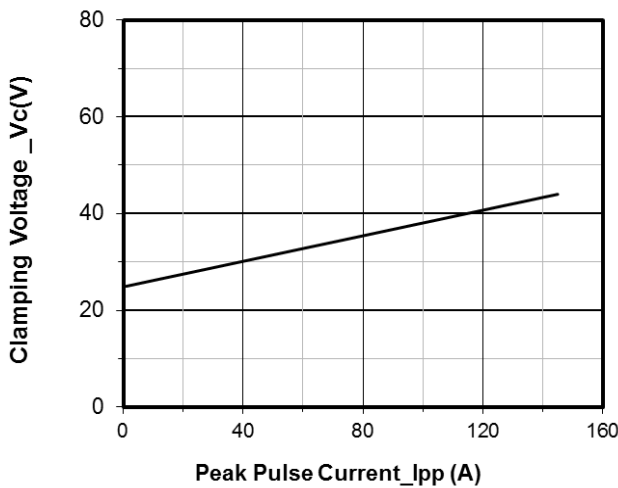

Clamping Voltage vs. Peak Pulse Current

Power Derating Curve

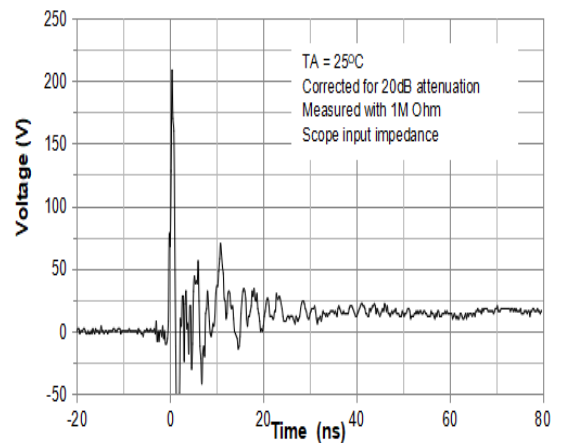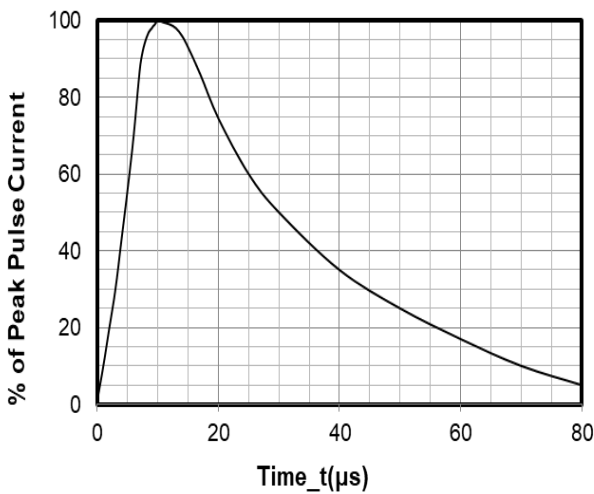


ESD Clamping Voltage

8 X 20μs Pulse Waveform


8 kV Contact per IEC61000-4-2

DFN2020-3 Package Outline Drawing

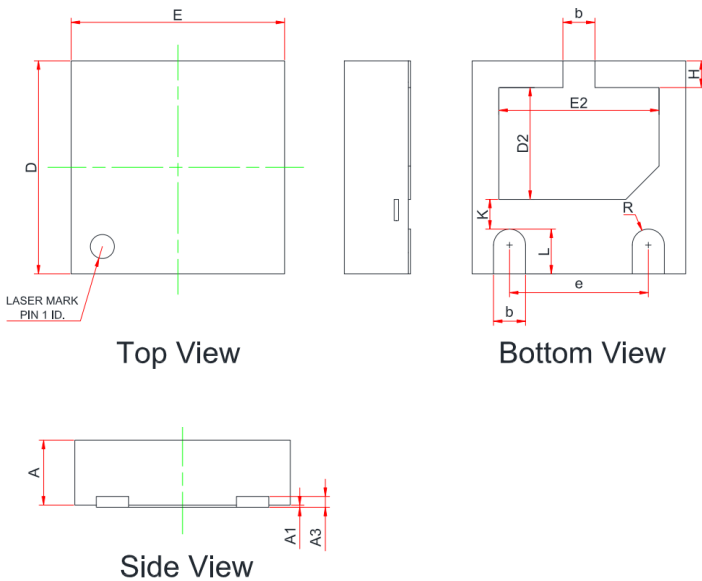

	MILLIMETERS		
	MIN	NOM	MAX
A	0.55	0.60	0.65
A1	0.00	0.02	0.05
A3	0.10REF.		
b	0.25	--	0.35
D	1.90	--	2.10
E	1.90	--	2.10
D2	0.95	--	1.15
E2	1.40	--	1.60
e	1.20		1.40
H	0.20	--	0.30
K	0.20		0.40
L	0.35	--	0.45
R	0.13	--	--

Suggested Land Pattern

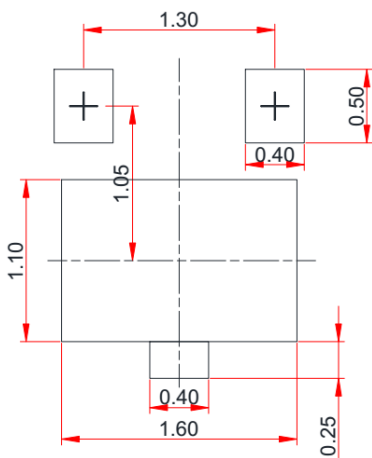

Unit: mm

Contact Information

Changzhou D-first Electronics CO.,Ltd.
 www.first-electronic.com
 Email: xhf@first-electronic.cn
 Phone: +86 (0519) 8817 1671