


## Description

The SRV05-2 is a low capacitance TVS array, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive high-speed data lines. The SRV05-2 has a low capacitance with a typical value at 2pF, and complies with the IEC61000-4-2 (ESD) standard with  $\pm 30\text{kV}$  air and  $\pm 30\text{kV}$  contact discharge. It is assembled into a 6-pin lead-free SOT23-6 package. The low capacitance array make it ideal for four high speed data and transmission line. This device is optimized for ESD protection of portable electronics.

## Mechanical Characteristics

- ◆ Package: SOT23-6
- ◆ Lead Finish: Matte Tin
- ◆ UL Flammability Classification Rating 94V-0
- ◆ Case Material: "Green" Molding Compound
- ◆ Moisture Sensitivity: Level 3 per J-STD-020
- ◆ Terminal Connections: See Diagram Below
- ◆ Marking Information: See Below

## Dimensions and Pin Configuration



Circuit and Pin Schematic


## Features

- ◆ Ultra low capacitance: 2pF typical (I/O to I/O)
- ◆ Ultra low leakage: nA level
- ◆ Low operating voltage: 5V
- ◆ Low clamping voltage
- ◆ Up to 2 data lines and one power line protects
- ◆ Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test
    - Air discharge:  $\pm 30\text{kV}$
    - Contact discharge:  $\pm 30\text{kV}$
  - IEC61000-4-4 (EFT) 40A (5/50ns)
- ◆ ROHS Compliant

## Applications

- ◆ USB 2.0
- ◆ Video Graphics Cards
- ◆ Digital video interface(DVI)
- ◆ Monitor and Flat Panel Displays
- ◆ Notebooks
- ◆ IEEE 1394 firewire ports
- ◆ 10/100 Ethernet

## Marking Information



SRV05-2 = Device Marking  
Code Dot denotes Pin1

## Ordering Information

Part Number	Marking	Packaging	Reel Size
SRV05-2	SRV05-2	3000/Tape & Reel	7 inch

**Absolute Maximum Ratings ( $T_A=25^{\circ}\text{C}$  unless otherwise specified)**

Parameter	Symbol	Rating	Unit
<b>Any IO Pin</b>			
Peak pulse power ( $t_p = 8/20\mu\text{s}$ )	$P_{pk}$	600	W
Peak pulse current ( $t_p = 8/20\mu\text{s}$ )	$I_{PP}$	35	A
ESD according to IEC61000-4-2 air discharge	$V_{ESD}$	$\pm 30$	kV
ESD according to IEC61000-4-2 contact discharge		$\pm 30$	
Junction temperature	$T_J$	125	$^{\circ}\text{C}$
Operation temperature	$T_{OP}$	-40 to 85	$^{\circ}\text{C}$
Storage temperature	$T_{STG}$	-55 to 150	$^{\circ}\text{C}$
Lead temperature	$T_L$	260	$^{\circ}\text{C}$
<b>Vcc Pin</b>			
Peak pulse power ( $t_p = 8/20\mu\text{s}$ )	$P_{pk}$	900	W
Peak pulse current ( $t_p = 8/20\mu\text{s}$ )	$I_{PP}$	50	A
ESD according to IEC61000-4-2 air discharge	$V_{ESD}$	$\pm 30$	kV
ESD according to IEC61000-4-2 contact discharge		$\pm 30$	
Junction temperature	$T_J$	125	$^{\circ}\text{C}$
Operation temperature	$T_{OP}$	-40 to 85	$^{\circ}\text{C}$
Storage temperature	$T_{STG}$	-55 to 150	$^{\circ}\text{C}$
Lead temperature	$T_L$	260	$^{\circ}\text{C}$


**Electrical Characteristics ( $T_A=25^\circ\text{C}$  unless otherwise specified)**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
<b>Any IO Pin</b>						
Reverse stand-off voltage	$V_{RWM}$				5.0	V
Reverse leakage current	$I_R$	$V_{RWM} = 5V$			500	nA
Reverse breakdown voltage	$V_{BR}$	$I_{BR} = 1\text{mA}$	6.0	8.5	10.0	V
Forward voltage	$V_F$	$I_F = 10\text{mA}$	0.6	0.9	1.2	V
Clamping voltage <sup>1)</sup>	$V_{CL}$	$I_{PP} = 16\text{A}$ , $t_p = 100\text{ns}$		13		V
Dynamic resistance <sup>1)</sup>	$R_{DYN}$	$t_p = 100\text{ns}$		0.2		$\Omega$
Clamping voltage <sup>2)</sup>	$V_{CL}$	$V_{ESD} = 8\text{kV}$		14		V
Clamping voltage <sup>3)</sup>	$V_{CL}$	$I_{PP} = 1\text{A}$ , $t_p = 8/20\mu\text{s}$			10	V
		$I_{PP} = 35\text{A}$ , $t_p = 8/20\mu\text{s}$			18	V
Junction capacitance	$C_{I/O - GND}$	$V_R = 0V$ , $f = 1\text{MHz}$ , $V_{DD} = \text{floated}$ , any I/O to GND			4.0	pF
	$C_{I/O - I/O}$	$V_R = 0V$ , $f = 1\text{MHz}$ , any I/O to I/O			2.0	pF
<b>Vcc Pin</b>						
Reverse stand-off voltage	$V_{RWM}$				5	V
Reverse leakage current	$I_R$	$V_{RWM} = 5V$		<10	100	nA
Reverse breakdown voltage	$V_{BR}$	$I_{BR} = 1\text{mA}$	6.5	8.0	9.5	V
Forward voltage	$V_F$	$I_F = 10\text{mA}$	0.5	0.8	1.1	V
Clamping voltage <sup>3)</sup>	$V_{CL}$	$I_{PP} = 1\text{A}$ , $t_p = 8/20\mu\text{s}$			10	V
		$I_{PP} = 50\text{A}$ , $t_p = 8/20\mu\text{s}$			15	V
Junction capacitance	$C_J$	$V_R = 0V$ , $f = 1\text{MHz}$ , $V_{DD}$ to GND		300	450	pF


**Notes:**

- 1) TLP parameter:  $Z_0 = 50\Omega$ ,  $t_p = 100\text{ns}$ ,  $t_r = 2\text{ns}$ , averaging window from 60ns to 80ns.  $R_{DYN}$  is calculated from 4A to 16A.
- 2) Contact discharge mode, according to IEC61000-4-2.
- 3) Non-repetitive current pulse, according to IEC61000-4-5.


**Typical Performance Characteristics (TA=25°C unless otherwise Specified)**

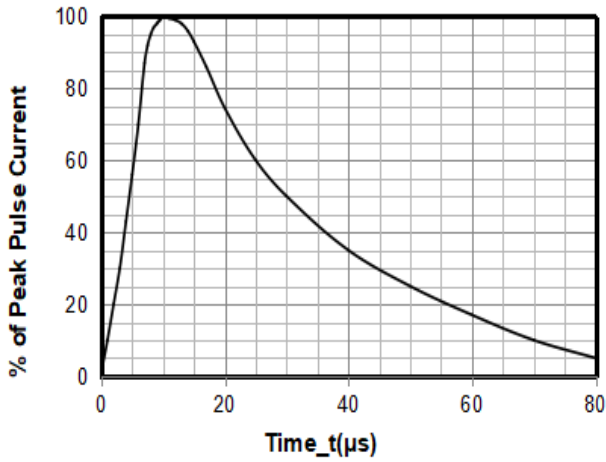


8 X 20μs Pulse Waveform

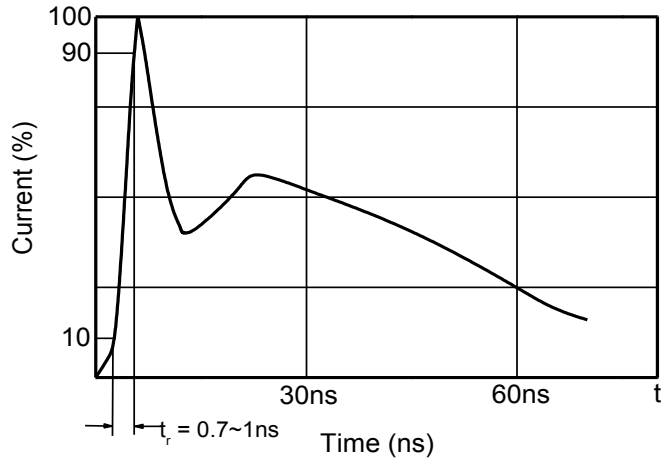



Contact discharge current waveform per IEC61000-4-2

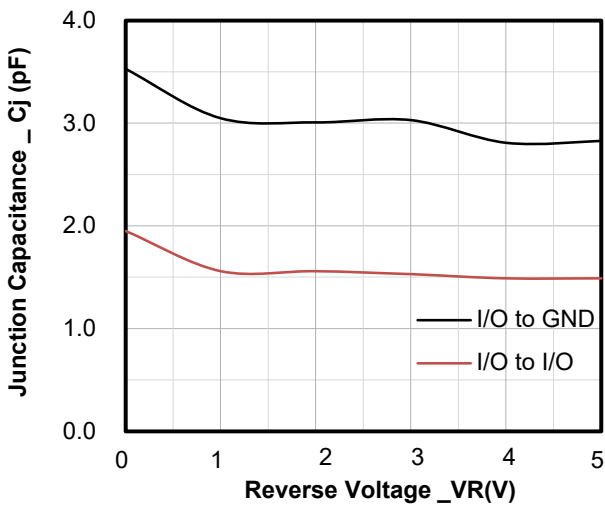

Junction Capacitance vs. Reverse Voltage

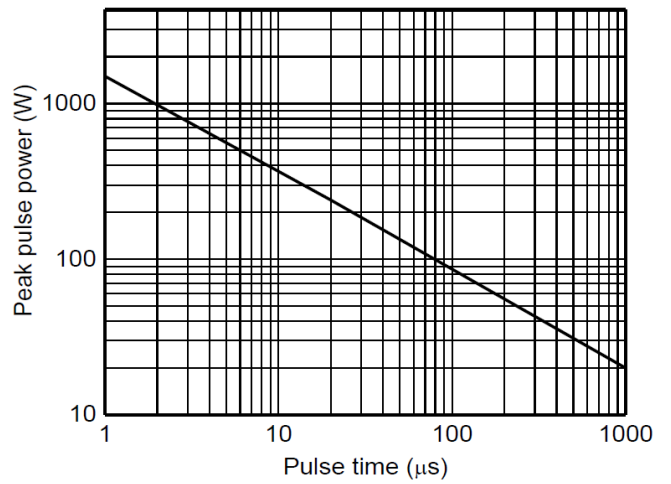


Non-repetitive peak pulse power vs. Pulse time (Any IO Pin)

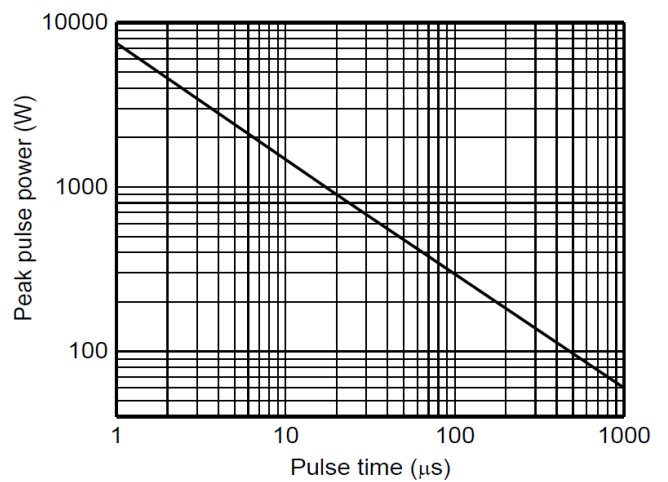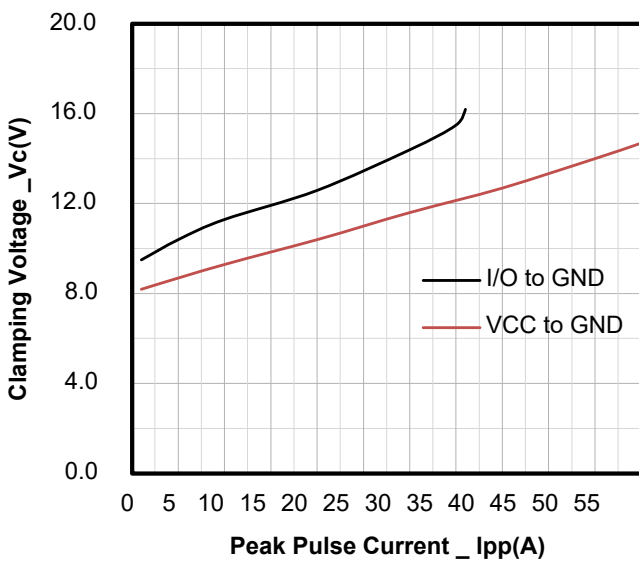


Non-repetitive peak pulse power vs. Pulse time (VDD Pin)

**Typical Performance Characteristics (TA=25°C unless otherwise Specified)**

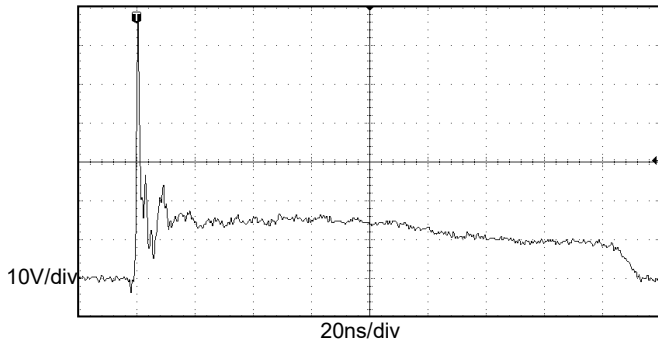


**ESD clamping**  
**(+8kV contact discharge per IEC61000-4-2)**  
**(Any IO Pin)**

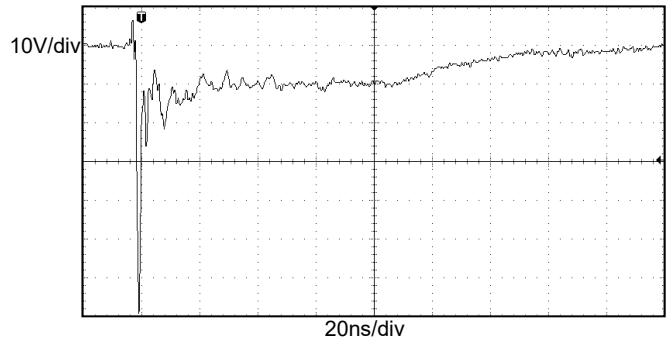


**ESD clamping**  
**(-8kV contact discharge per IEC61000-4-2)**  
**(Any IO Pin)**

## SOT23-6 Package Outline Drawing

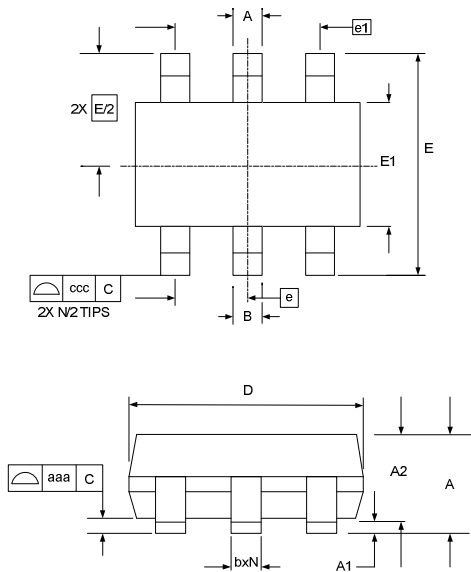

SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.90		1.45	0.035		0.057
A1	0.00		0.15	0.000		0.006
A2	0.90	1.15	1.30	0.035	0.045	0.051
b	0.25		0.50	0.010		0.020
c	0.08		0.22	0.003		0.009
D	2.80	2.90	3.10	0.110	0.114	0.122
E1	1.50	1.60	1.75	0.060	0.063	0.069
E	2.80 BSC			0.110 BSC		
e	0.95 BSC			0.037 BSC		
e1	1.90 BSC			0.075 BSC		
N	6			6		
aaa	0.10			0.004		
ccc	0.20			0.008		

## Suggested Land Pattern

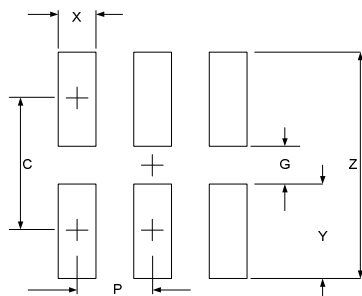

SYM	DIMENSIONS	
	MILLIMETERS	INCHES
C	2.50	0.098
G	1.40	0.055
P	0.95	0.037
X	0.60	0.024
Y	1.10	0.043
Z	3.60	0.141

## Contact Information

Changzhou D-first Electronics CO.,Ltd.

www.first-electronic.com

Email: xhf@first-electronic.cn

Phone: +86 (0519) -8817 1671