

Description


The ESDA05C-5 is a high frequency, transient suppression protector of computer and telecommunication systems. This device is packaged in a SOT23-6 plastic case and is available in a 5V, bidirectional configuration.

Due to its low capacitance, the ESDA05C-5 is ideal protection of computer port interfaces against the effects of electrostatic discharge(ESD) and electrical fast transients(EFT). This device meets the requirements of IEC 61000-4-2 and IEC 61000-4-4.

Mechanical Characteristics

- ◆ Package: SOT23-6
- ◆ Approximate Weight: 16 milligrams
- ◆ Lead-free Pure-Tin Plating(Annealed)
- ◆ Solder Reflow Temperature:
Pure-Tin-Sn, 100: 260-270°C
- ◆ UL Flammability Classification Rating 94V-0
- ◆ 8mm Tape and Reel per EIA Standard 481
- ◆ Marking Information: See Below

Dimensions and Pin Configuration



Circuit and Pin Schematic


Features

- ◆ 80W Peak Pulse Power per Line(tp=8/20µs)
- ◆ Protection for 5 lines
- ◆ Bidirectional configuration
- ◆ Low clamping voltage
- ◆ Low leakage current < 1µA
- ◆ Low capacitance < 15pF per diode
- ◆ Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
Air discharge: ±15kV
Contact discharge: ±8kV
 - IEC61000-4-4 (EFT) 40A (5/50ns)
- ◆ ROHS Compliant
- ◆ REACH Compliant

Applications

- ◆ Set-Top Box Interfaces
- ◆ Computer Interfaces
- ◆ Communications Equipment

Marking Information



ED5 = Device Marking Code
Dot denotes Pin1

Ordering Information

Part Number	Marking	Packaging	Reel Size
ESDA05C-5	ED5	3000/Tape & Reel	7 inch

Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise specified)



Parameter	Symbol	Value	Unit
Peak Pulse Power ($t_p=8/20\mu\text{s}$)	PPP	80	W
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	± 15 ± 8	kV
Operating Temperature Range	T_J	-55 to +125	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^{\circ}\text{C}$

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise specified)


Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	V_{RWM}			5	V	
Breakdown Voltage	V_{BR}	6.1			V	$I_T = 1\text{mA}$
Reverse Leakage Current	I_{R}			1	μA	$V_{\text{RWM}} = 5\text{V}$
Junction Capacitance	C_J		15		pF	$V_{\text{R}} = 0\text{V}$, $f = 1\text{MHz}$

Note 1: Test between pins 2 to 1, 2 to 6, 2 to 5, 2 to 4 and 2 to 3. Electrical characteristics apply in both directions.
 2: Capacitance measured between pins 1, 3, 4, 5 and 6 to 2.

Typical Performance Characteristics (TA=25°C unless otherwise Specified)

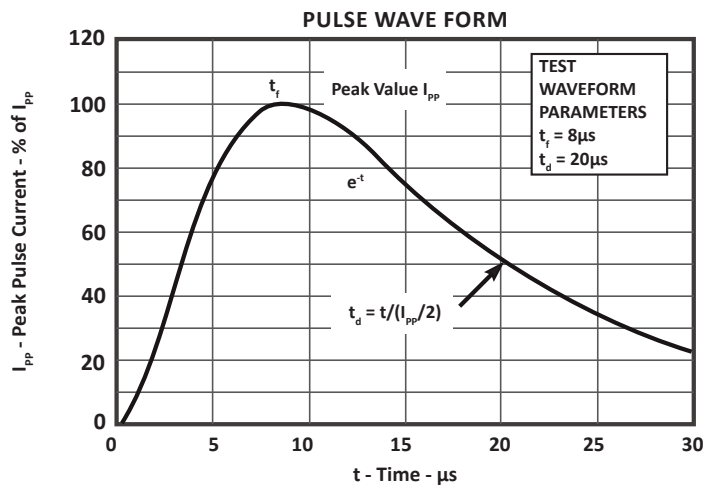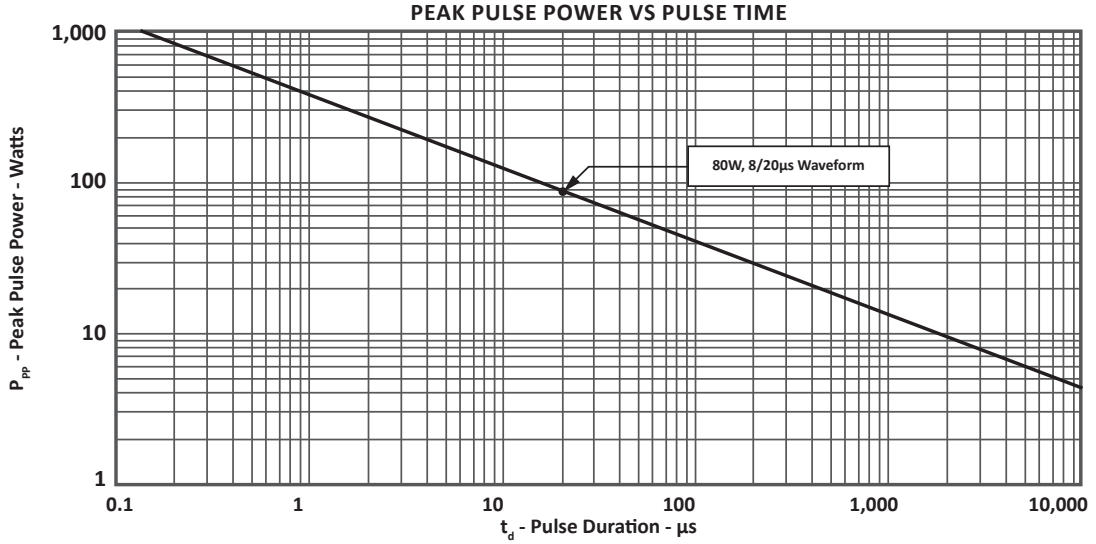


SOT23-6 Package Outline Drawing

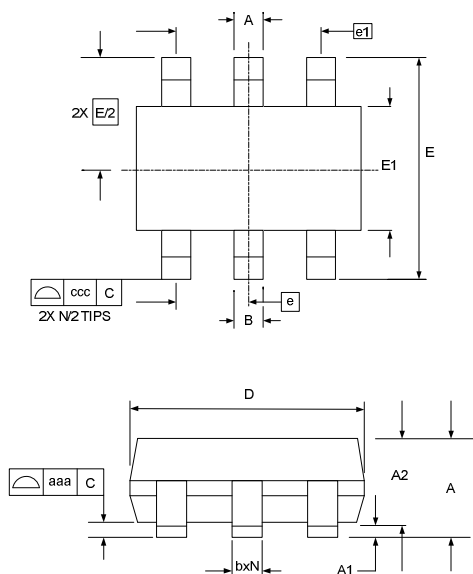

SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.90		1.45	0.035		0.057
A1	0.00		0.15	0.000		0.006
A2	0.90	1.15	1.30	0.035	0.045	0.051
b	0.25		0.50	0.010		0.020
c	0.08		0.22	0.003		0.009
D	2.80	2.90	3.10	0.110	0.114	0.122
E1	1.50	1.60	1.75	0.060	0.063	0.069
E	2.80 BSC			0.110 BSC		
e	0.95 BSC			0.037 BSC		
e1	1.90 BSC			0.075 BSC		
N	6			6		
aaa	0.10			0.004		
ccc	0.20			0.008		

Suggested Land Pattern

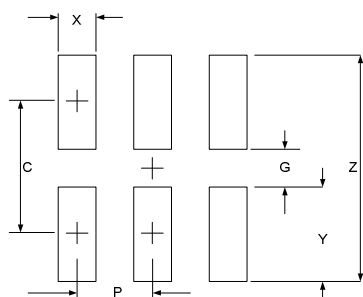

SYM	DIMENSIONS	
	MILLIMETERS	INCHES
C	2.50	0.098
G	1.40	0.055
P	0.95	0.037
X	0.60	0.024
Y	1.10	0.043
Z	3.60	0.141

Contact Information

Changzhou D-first Electronics CO.,Ltd.

www.first-electronic.com

Email: xhf@first-electronic.cn

Phone: +86 (0519) -8817 1671