


Description

The DCSMxxCL is a bi-directional TVS diode array, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting sensitive semiconductor components from damage. The DCSMxxCL complies with the IEC 61000-4-2 (ESD) standard with $\pm 30\text{kV}$ air and $\pm 30\text{kV}$ contact discharge. It is assembled into a lead-free SOT-23 package. It is designed to protect components which are connected to data and transmission lines from voltage surges.

Mechanical Characteristics

- ◆ Package: SOT-23
- ◆ Lead Finish: Matte Tin
- ◆ Case Material: "Green" Molding Compound.
- ◆ UL Flammability Classification Rating 94V-0
- ◆ Moisture Sensitivity: Level 3 per J-STD-020
- ◆ Terminal Connections: See Diagram Below
- ◆ Marking Information: See Below

Dimensions and Pin Configuration

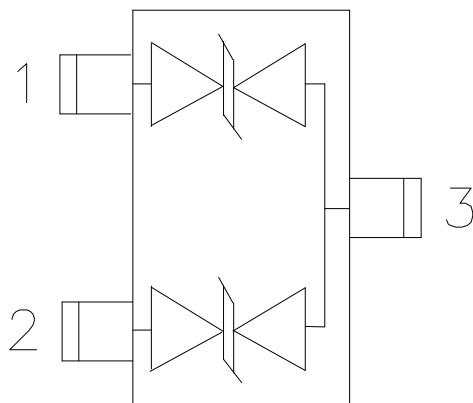

Circuit and Pin Schematic


Features

- ◆ 150W peak pulse power(8/20 μs)
- ◆ Protects two bi-directional lines
- ◆ Ultra low leakage: nA level
- ◆ Operating voltage: 3.3V,5V,8V,15V
- ◆ Low clamping voltage
- ◆ Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: $\pm 30\text{kV}$
 - Contact discharge: $\pm 30\text{kV}$
 - IEC61000-4-4 (EFT) 40A (5/50ns)
- ◆ RoHS Compliant

Applications

- ◆ Cellular Handsets and Accessories
- ◆ Notebooks and Handhelds
- ◆ Portable Instrumentation
- ◆ Set Top Box
- ◆ Industrial Controls
- ◆ Server and Desktop PC

Marking Information



xx represents the voltage

Ordering Information

Part Number	Marking	Packaging	Reel Size
DCSMxxCL	xxCL	3000/Tape & Reel	7 inch

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power(8/20 μs)	Ppk	150	W
ESD per IEC 61000-4-2 (Air)	VESD	± 30	kV
ESD per IEC 61000-4-2 (Contact)		± 30	
Operating Temperature Range	TJ	-55 to +125	$^\circ\text{C}$
Storage Temperature Range	Tstg	-55 to +150	$^\circ\text{C}$

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise specified)

DCSM03CL (Marking Code: 03CL)						
Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	VRWM			3.3	V	
Breakdown Voltage	VBR	4			V	$I_T = 1\text{mA}$
Reverse Leakage Current	IR		0.01	0.5	μA	$V_{RWM} = 3.3\text{V}$
Clamping Voltage	VC		5		V	$I_{PP} = 1\text{A}$ (8 x 20 μs pulse)
Clamping Voltage	VC		10		V	$I_{PP} = 10\text{A}$ (8 x 20 μs pulse)
Peak Pulse Current	I _{PP}			10	A	$t_P=8/20\mu\text{s}$
Junction Capacitance	CJ			25	pF	$V_R=0$, $f=1\text{MHz}$, Pin 1 to Pin 3 or Pin 2 to Pin 3


DCSCM05CL (Marking Code: 05CL)						
Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	VRWM			5	V	
Breakdown Voltage	VBR	6			V	IT = 1mA
Reverse Leakage Current	IR		0.01	0.5	μA	VRWM = 5V
Clamping Voltage	VC		7		V	I _{PP} = 1A (8 x 20μs pulse)
Clamping Voltage	VC		11		V	I _{PP} = 8.5A (8 x 20μs pulse)
Peak Pulse Current	I _{PP}			8.5	A	t _p =8/20μs
Junction Capacitance	C _J			20	pF	VR=0, f=1MHz, Pin 1 to Pin 3 or Pin 2 to Pin 3

DCSCM08CL (Marking Code: 08CL)						
Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	VRWM			8	V	
Breakdown Voltage	VBR	8.5			V	IT = 1mA
Reverse Leakage Current	IR		0.01	0.5	μA	VRWM = 8V
Clamping Voltage	VC		10		V	I _{PP} = 1A (8 x 20μs pulse)
Clamping Voltage	VC		15		V	I _{PP} = 7A (8 x 20μs pulse)
Peak Pulse Current	I _{PP}			7	A	t _p =8/20μs
Junction Capacitance	C _J			20	pF	VR=0, f=1MHz, Pin 1 to Pin 3 or Pin 2 to Pin 3


DCSCM15CL (Marking Code: 15CL)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	V_{RWM}			15	V	
Breakdown Voltage	V_{BR}	16.7			V	$I_T = 1\text{mA}$
Reverse Leakage Current	I_R		0.01	0.5	μA	$V_{RWM} = 15\text{V}$
Clamping Voltage	V_C		20		V	$I_{PP} = 1\text{A}$ (8 x 20 μs pulse)
Clamping Voltage	V_C		30		V	$I_{PP} = 3\text{A}$ (8 x 20 μs pulse)
Peak Pulse Current	I_{PP}			3	A	$t_P = 8/20\mu\text{s}$
Junction Capacitance	C_J			15	pF	$V_R = 0$, $f = 1\text{MHz}$, Pin 1 to Pin 3 or Pin 2 to Pin 3


Typical Performance Characteristics (TA=25°C unless otherwise Specified)

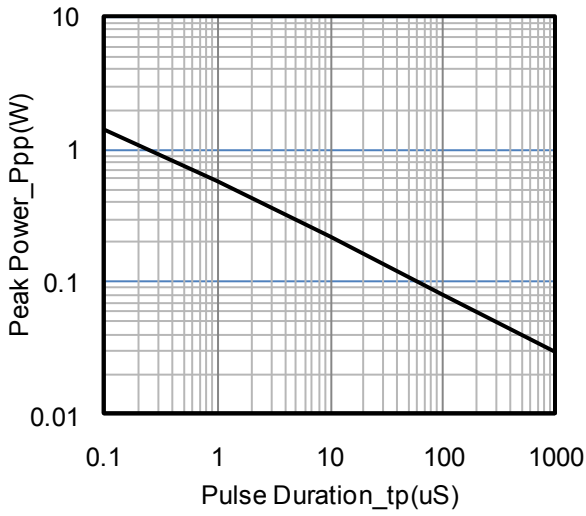

Peak Pulse Power vs. Pulse Time



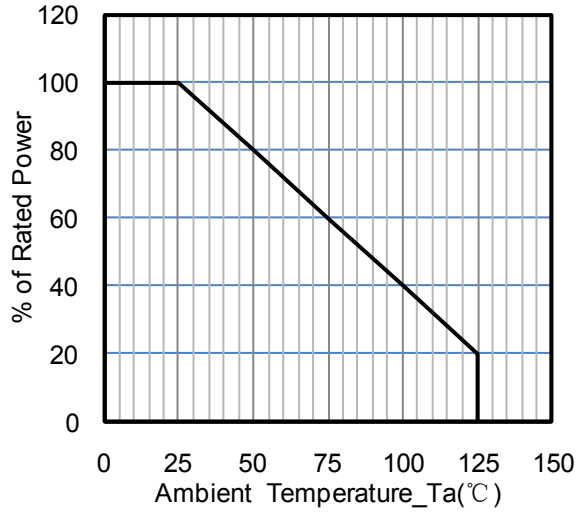


Power Derating Curve

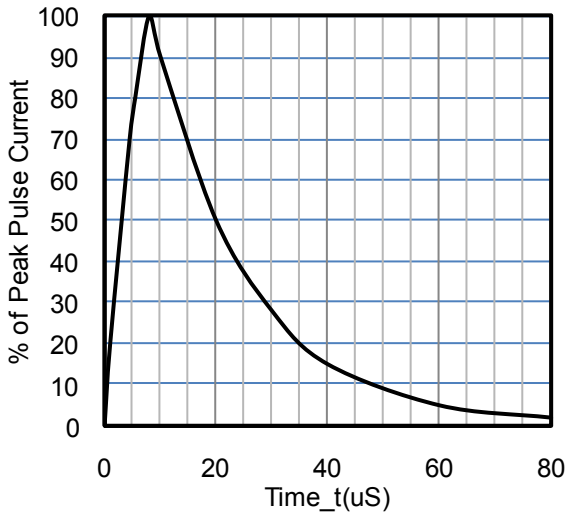


8X 20μs Pulse Waveform

SOT-23 Package Outline Drawing

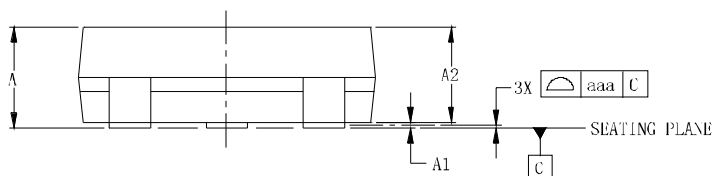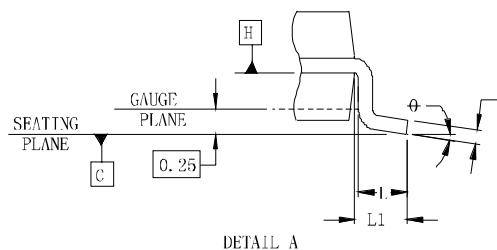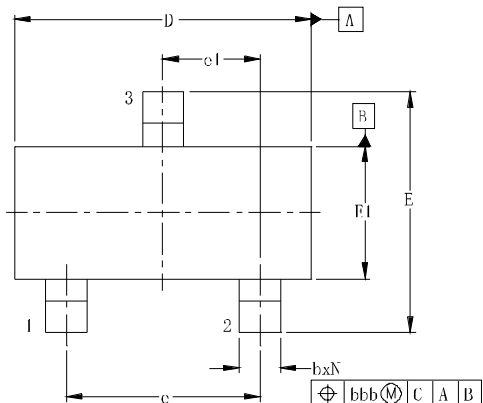

DIMENSIONS						
SYM	INCHES			MILLIMETERS		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.035	-	0.044	0.89	-	1.12
A1	0.000	-	0.004	0.01	-	0.10
A2	0.035	0.037	0.040	0.88	0.95	1.02
b	0.012	-	0.020	0.30	-	0.51
c	0.003	-	0.007	0.08	-	0.18
D	0.110	0.114	0.120	2.80	2.90	3.04
E	0.082	0.093	0.104	2.10	2.37	2.64
E1	0.047	0.051	0.055	1.20	1.30	1.40
e	0.075			1.90BSC		
e1	0.037			0.95BSC		
L	0.015	0.020	0.024	0.40	0.50	0.60
L1	0.022			0.55		
N	3			3		
ϕ	0°	-	8°	0°	-	8°
aaa	0.004			0.10		
bbb	0.008			0.20		

Suggested Land Pattern

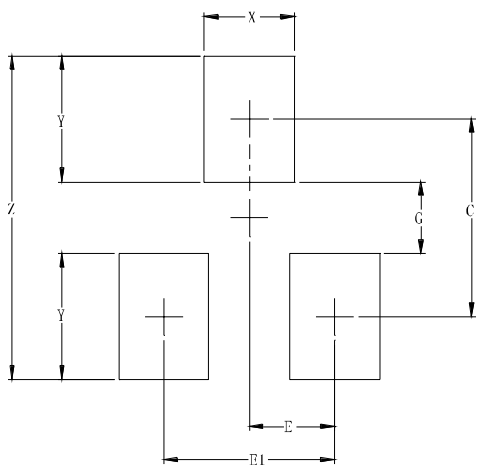

DIMENSIONS		
SYM	INCHES	MILLIMETERS
C	0.087	2.20
E	0.037	0.95
E1	0.075	1.90
G	0.031	0.80
X	0.039	1.00
Y	0.055	1.40
Z	0.141	3.60

Contact Information

Changzhou D-first Electronics CO.,Ltd.
 www.first-electronic.com
 Email: xhf@first-electronic.cn
 Phone: +86 (0519) 8817 1671